


CLIFF

DUALSLIM CAT.6 RJ45 SHIELDED METAL FRAME FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel

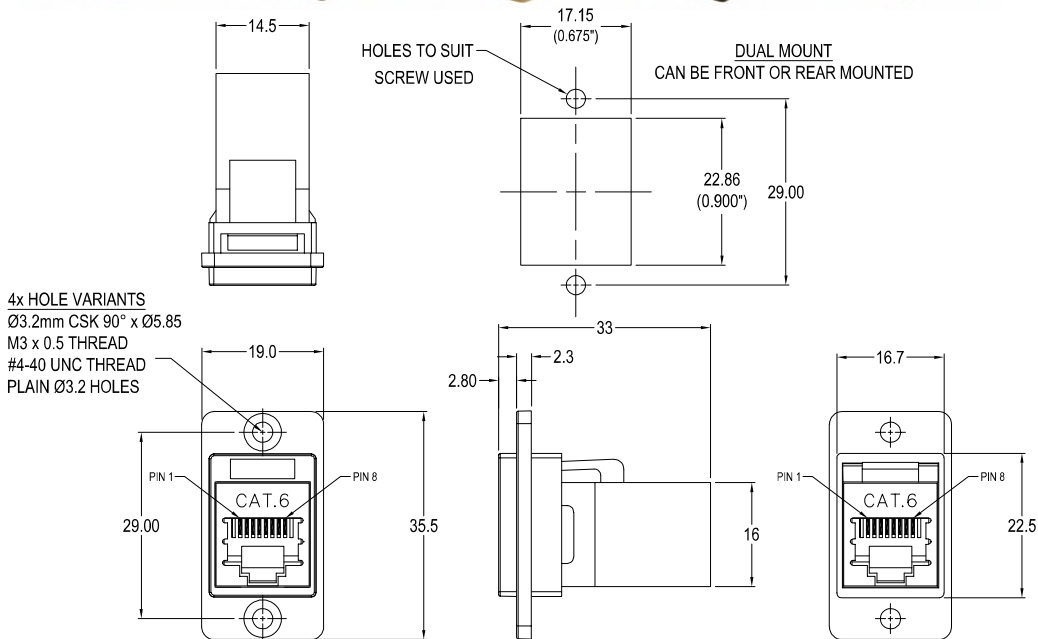

VARIANTS

Part No.

CP30722SM

DUALSLIM Cat.6 RJ45 Shielded Nickel frame, CSK holes

CP30722SMB

DUALSLIM Cat.6 RJ45 Shielded Black metal frame, CSK holes

CP30722SM3

DUALSLIM Cat.6 RJ45 Shielded Nickel frame, M3 holes

CP30722SMB3

DUALSLIM Cat.6 RJ45 Shielded Black metal frame, M3 holes

CP30722SM440

DUALSLIM Cat.6 RJ45 Shielded Nickel frame, #4-40 holes

CP30722SMB440

DUALSLIM Cat.6 RJ45 Shielded Black metal frame, #4-40 holes

CP30722SMX1

DUALSLIM Cat.6 RJ45 Shielded Nickel frame, Ø3.2 PLAIN holes

CP30722SMBX1

DUALSLIM Cat.6 RJ45 Shielded Black metal frame, Ø3.2 PLAIN holes

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. RJ45 In-Line Coupler: ABS UL94-V0 Fully Shielded
2. RJ45 In-Line Coupler Contact:
Phosphor Bronze, 3-50 micro inches gold plating over nickel plate.
3. PCB: FR4
4. Frame: Diecast, Nickel or Black plated

Performance:

1. T568A & T568B wiring.
2. Meet ISO/IEC 11801 and EN50173
3. Meet ANSI/TIA/EIA 568B.2
4. Rating: 125VAC RMS 1.5A
5. Operating Temperatures: Min -10°C Max +70°C