


CLIFF

4P4C 7.8mm FEEDTHROUGH CONNECTOR (RJ9/10/22)

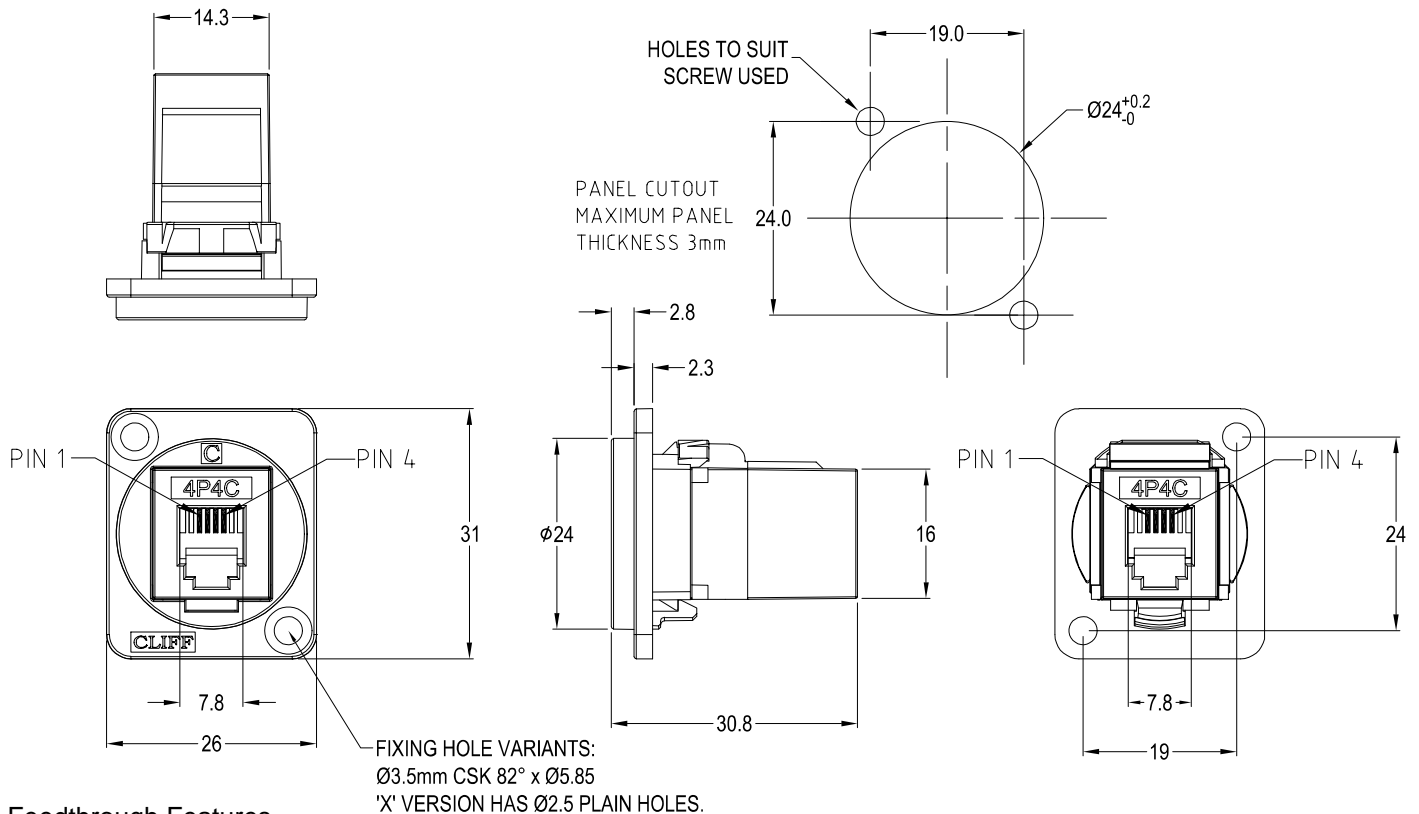

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

- 1) 4P4C In-Line Coupler: ABS, UL HB
- 2) 4P4C Contacts: Phosphor Bronze, 3-50 micro inches gold plating over nickel plate.
- 3) PCB: FR4, UL 94V-0
- 4) Frame: Polyamide 94V-2
- 5) Operating Temperatures: Min -10°C Max +60°C

VARIANTS

Part No.

CP30228	4P4C (7.8mm) Black plastic frame, CSK holes
CP30228W	4P4C (7.8mm) White plastic frame, CSK holes
CP30228X	4P4C (7.8mm) Black plastic frame, PLAIN holes
CP30228XW	4P4C (7.8mm) White plastic frame, PLAIN holes

For further information, contact sales@cliffuk.co.uk

© CLIFF 02/2022 ISS.1

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012



www.cliffuk.co.uk