ISS	AMEND	DATE
1	Ist DRAWN	07/01/08
2	X3G ADDED	09/10/08
3	VARS. ADDED	05/01/09

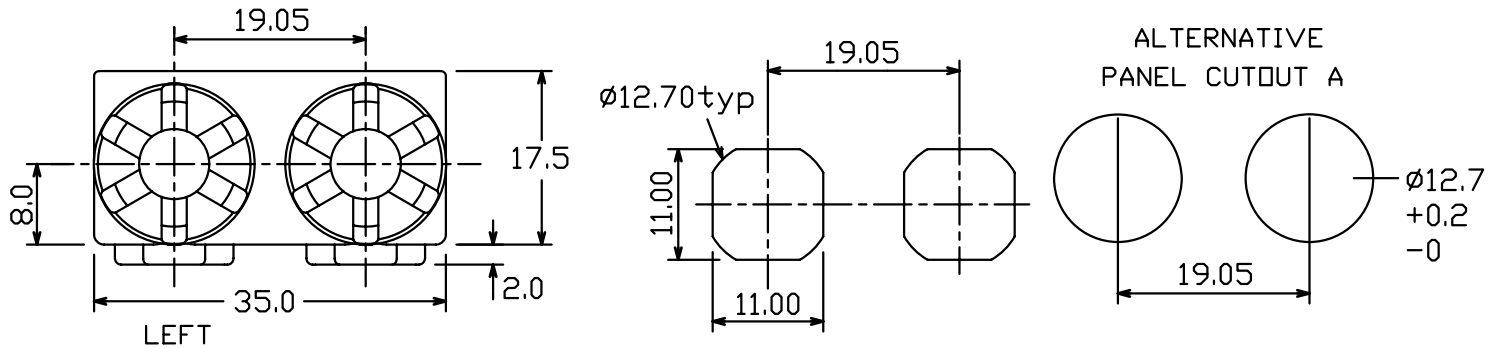

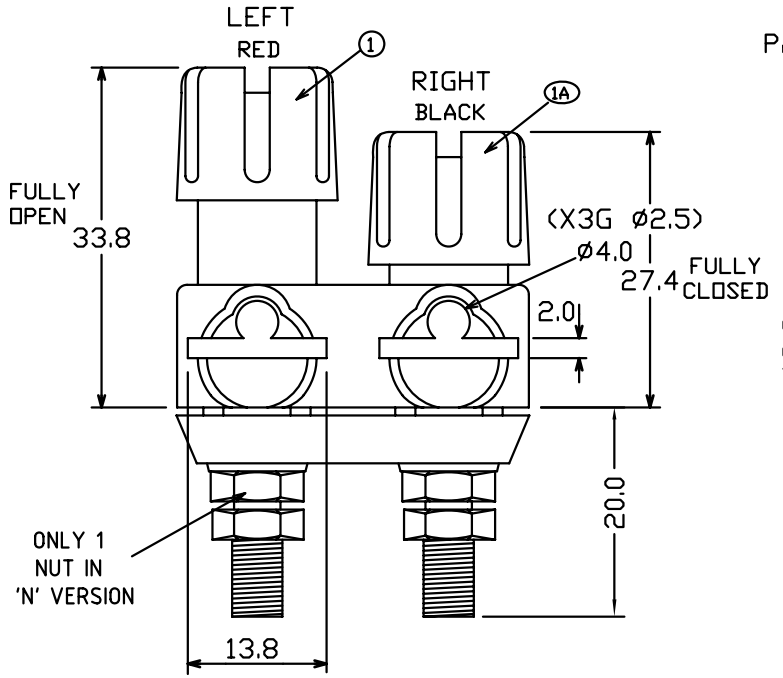

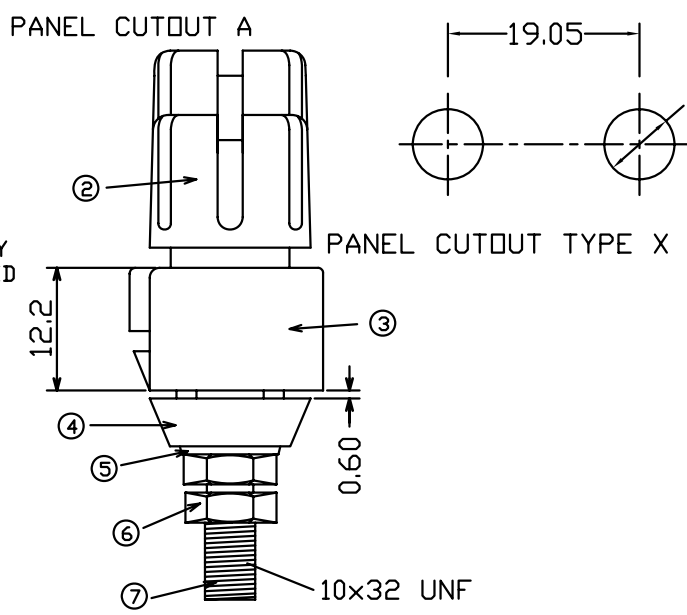

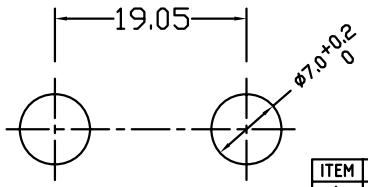

USER TIGHTEN NUTS TO MAX 1.5NM.

ITEM	DESCRIPTION	QTY	P/No.
1	KNOB RED	1	CL7846R
1A	KNOB BLACK	1	CL7846B
2	KNOB INSERT NICKEL	2	CL7883SA3
2A	KNOB INSERT GOLD	2	CL7883SA3G
3	TPP/5 INSULATOR	1	CL7860NF
4	BOTTOM INSULATOR	1	CL7858B
5	PLAIN WASHER Ni	2	CL7880SA9
5A	PLAIN WASHER GOLD	2	CL7880SA9G
6	NUT NICKEL	4	CL7880SA7
	NUT NICKEL	2	N' VERSIONS
6A	NUT GOLD	4	CL7880SA7G
	NUT GOLD	2	N 'VERSIONS
7	SPINDLE ASSY Ni	2	CL7883F(1)
7A	SPINDLE ASSY GOLD	2	CL7883FG(1)

VARIANTS

MODEL REF	X TYPE	2.5mmø CROSSHOLE	A TYPE	Ni PLATED	GOLD PLATED	TOP INS COLOUR	KNOB COLOUR LEFT	KNOB COLOUR RIGHT	P/No.
TPP/5CT			•	•		BLACK	RED	BLACK	CL159706X1
TPP/5CT/R			•	•		BLACK	BLACK	RED	CL159706X5
TPP/5ZG		•	•		•	BLACK	RED	BLACK	CL159706X3G
TPP/5NMSG			•		•	BLACK	RED	BLACK	CL159706YA
TPP/5N RPR WPL			•	•		BLACK	RED	WHITE	CL159706X545
TPP/5N RPL WPR			•	•		BLACK	WHITE	RED	CL159706X145

NOTE 1: GOLD VERSIONS USE ITEMS (2A.5A.6A.7A)
NOTE 2: PARTS 4. 5. 6 SUPPLIED BAGGED SEPARATELY. PARTS 1. 1A TO BE ASSEMBLED INTO PART 3.
SUPPLIED IN TRAY PACKING.
NOTE 3:★MODELS WITH 'N' IN P/No. SUPPLIED WITH 1 NUT ONLY.

TO BE SUPPLIED WITH KNOB FULLY UNSCREWED.

RoHS COMPLIANT

Tolerance
NO DEC. PLACE ±
1 DEC. PLACE ±0.25
2 DEC. PLACE ±0.1
DIA. HOLES ±
ANGLES ±1/2°
UNLESS OTHERWISE STATED

WHERE USED F.R.

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. DO NOT SCALE DRAWING. 1ST ANGLE PROJECTION. REMOVE BURRS. IF IN DOUBT ASK.

SCALE N.T.S.

CLIFF

MATERIAL: NYLON 6 / BRASS
FINISH: AS MOULDED / Ni (OR GOLD) PLATED
DRAWN: XHZ
APPD.: PCS

TITLE: TERMINAL ASSEMBLY TPP/5CT
DRWG. NO : CL159706
FORM:A4DRWGH