

CLIFF

METAL FEEDTHROUGH CONNECTORS



CP30116 - FT XLR HDMI A-A METAL



CP30122 - FT XLR HDMI A-A BLACK METAL

Specification /Technical Data:

Contact Resistance: 30mΩ MAX





Insulation Resistance: 500MΩ min

Dielectric withstanding voltage: 500V AC one minute

Rated Current: 0.5A

Rated Voltage: 40V

Temperature Range: -30°C to 50°C

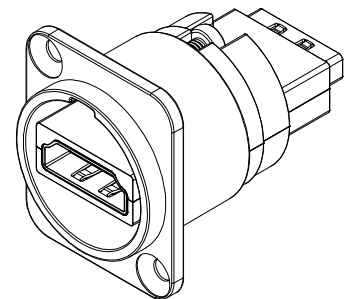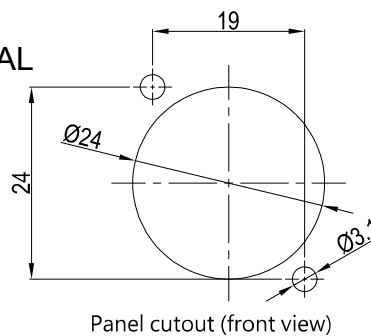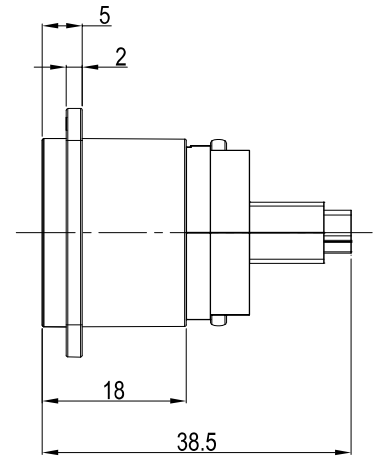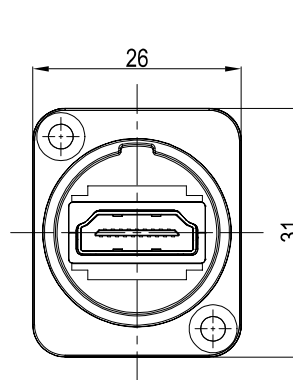

CP30117 - FT XLR FIREWIRE IEEE 1394 METAL

