




USB3.0 A-A FEEDTHROUGH CONNECTOR

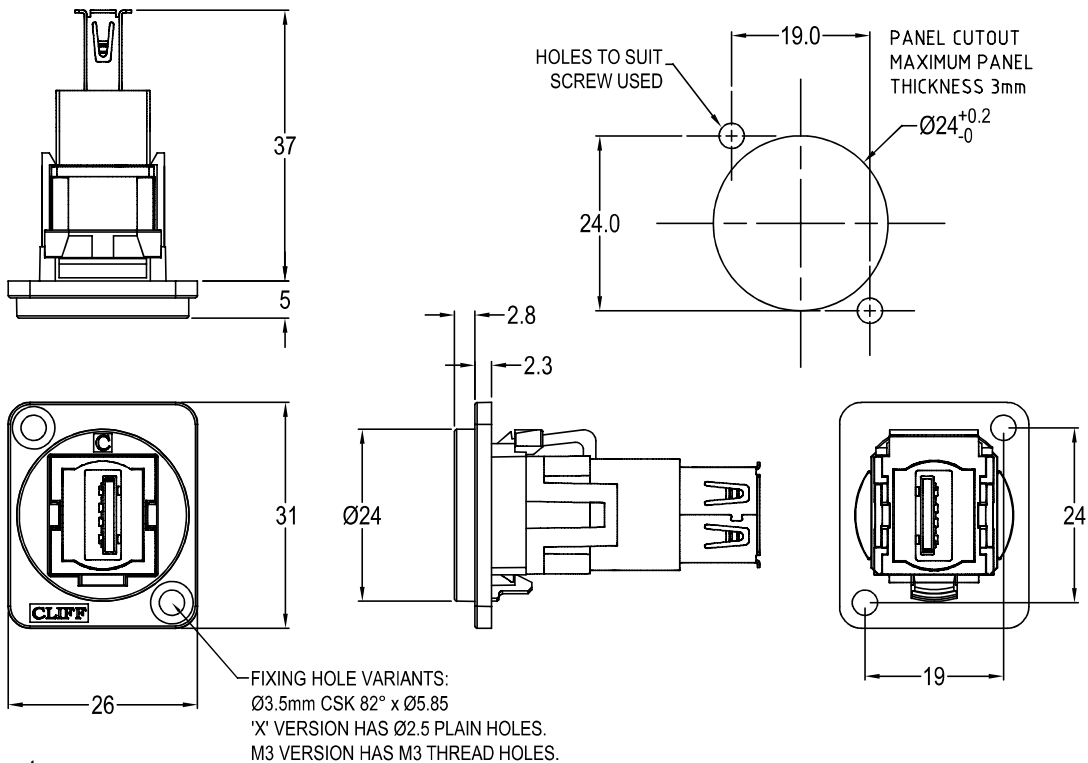

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. Insert: ABS UL94 HB
2. Plastic Frame: Polyamide UL94 V2
3. Metal Frame: Diecast, Black or Nickel plated
4. Inner Overmouldings: PE + PVC
5. Shell: Nickel plated steel
6. Contacts: Gold Plated

VARIANTS

Part No.

- | | |
|--------------------|---|
| CP30205N | USB3.0 A-A Black plastic frame, CSK holes |
| CP30205NW | USB3.0 A-A White plastic frame, CSK holes |
| CP30205NM | USB3.0 A-A Nickel plated metal frame, CSK holes |
| CP30205NM3 | USB3.0 A-A Nickel plated metal frame, M3 holes |
| CP30205NMB | USB3.0 A-A Black metal frame, CSK holes |
| CP30205NM3B | USB3.0 A-A Black metal frame, M3 holes |
| CP30205NX | USB3.0 A-A Black plastic frame, PLAIN holes |
| CP30205NXW | USB3.0 A-A White plastic frame, PLAIN holes |

Notes:

1. Voltage rating: 30V ac
2. Current rating: 1.8 A max
3. Contact resistance: 50mΩ max
4. Insulation resistance: 20MΩ min
5. Dielectric withstanding voltage: 500V AC
6. Operating Temperature: -20°C to 50°C