DUALSLIM USB2 A-A RIGHT ANGLE METAL FEEDTHROUGH

Can be front or rear mounted in the panel

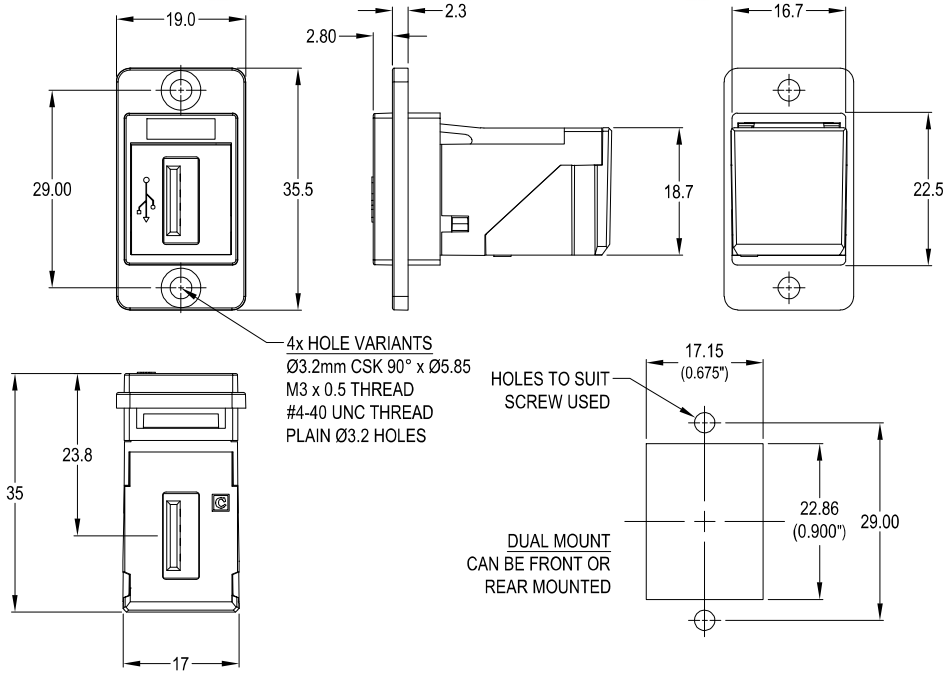

VARIANTS

Part No.	
CP30754M	RAFT DUALSLIM USB2 A-A Nickel frame, CSK holes
CP30754MB	RAFT DUALSLIM USB2 A-A Black metal frame, CSK holes
CP30754M3	RAFT DUALSLIM USB2 A-A Nickel frame, M3 holes
CP30754MB3	RAFT DUALSLIM USB2 A-A Black metal frame, M3 holes
CP30754M440	RAFT DUALSLIM USB2 A-A Nickel frame, #4-40 holes
CP30754MB440	RAFT DUALSLIM USB2 A-A Black metal frame, #4-40 holes
CP30754MX1	RAFT DUALSLIM USB2 A-A Nickel frame, Ø3.2 PLAIN holes
CP30754MBX1	RAFT DUALSLIM USB2 A-A Black metal frame, Ø3.2 PLAIN holes

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.
- 90° or right angle rear cable entry.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. Keystone Body: ABS UL94 V2
2. USB (White): UL94 V-0
3. FT Frame: Nickel or Black Plated Zinc Diecast
4. Shell: Nickel plated Copper Alloy
5. Contacts: Gold Plated Copper Alloy

Performance:

1. Voltage rating: 30V AC
2. Current rating: 1.5A max
3. Contact resistance: 30mΩ max
4. Insulation resistance: 100MΩ min
5. Dielectric withstanding voltage: 500V AC
6. Operating Temperature: -20°C to 50°C

© CLIFF 03/2023 ISS.1

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

www.cliffuk.co.uk

RoHS