


CLIFF

FEEDTHROUGH CONNECTOR USB-C FEMALE - FEMALE

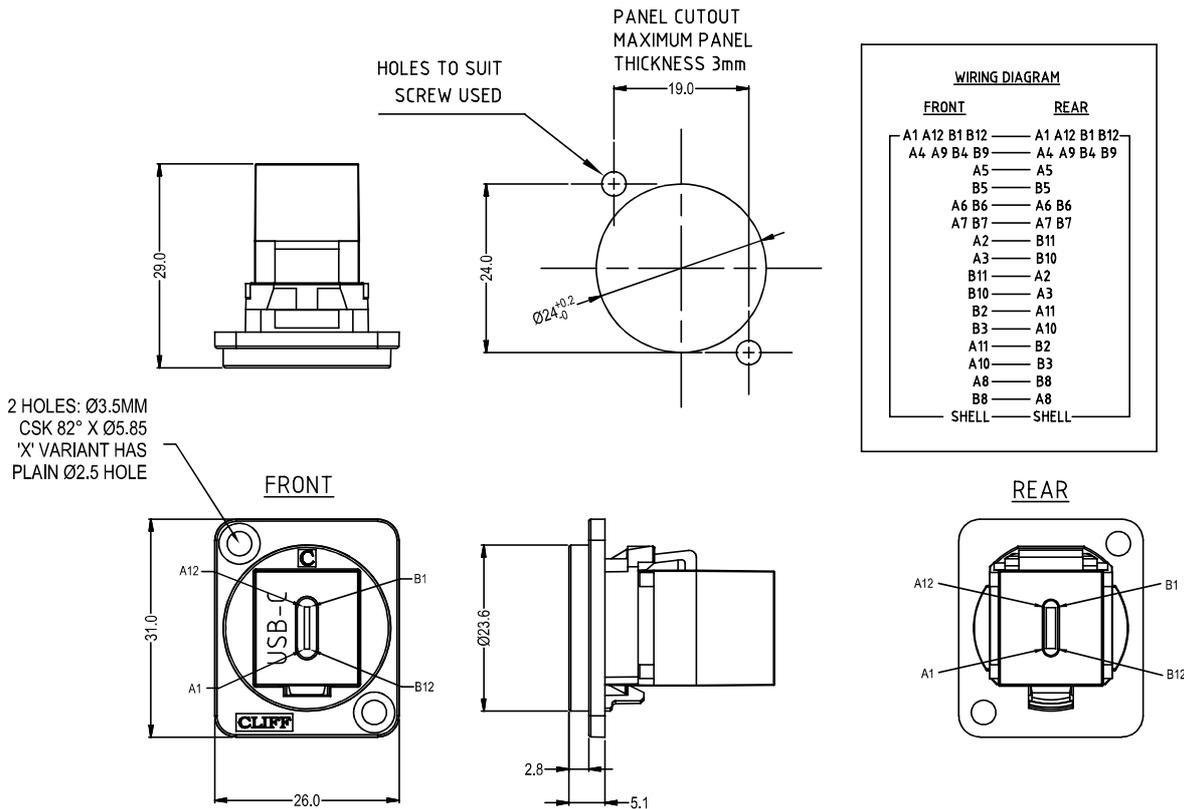

N.B.
FUNCTIONALITY IS AFFECTED BY CABLE QUALITY, LENGTH AND CABLE WIRING CONFIGURATION.
NOT COMPATIBLE FOR POWER DELIVERY (PD) CHARGING.

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

VARIANTS

Part No.

- | | |
|------------------|---|
| CP30201 | USB-C Female - Female, Black plastic frame, CSK holes |
| CP30201W | USB-C Female - Female, White plastic frame, CSK holes |
| CP30201X | USB-C Female - Female, Black plastic frame, Plain holes |
| CP30201XW | USB-C Female - Female, White plastic frame, Plain holes |

USB-C Specification:

- Maximum Rated Current - 3A
- Maximum Power - 60W
- Withstanding Voltage - 100V for 1 minute.
- Contact Resistance - 40 Milli-ohms Max.
- Insulation Resistance - 100 Mega-ohms Min.
- Insertion Life - 5,000 Cycles.

Materials:

- Frame: PA66, UL94-V2
- Insert: ABS - UL94 HB