
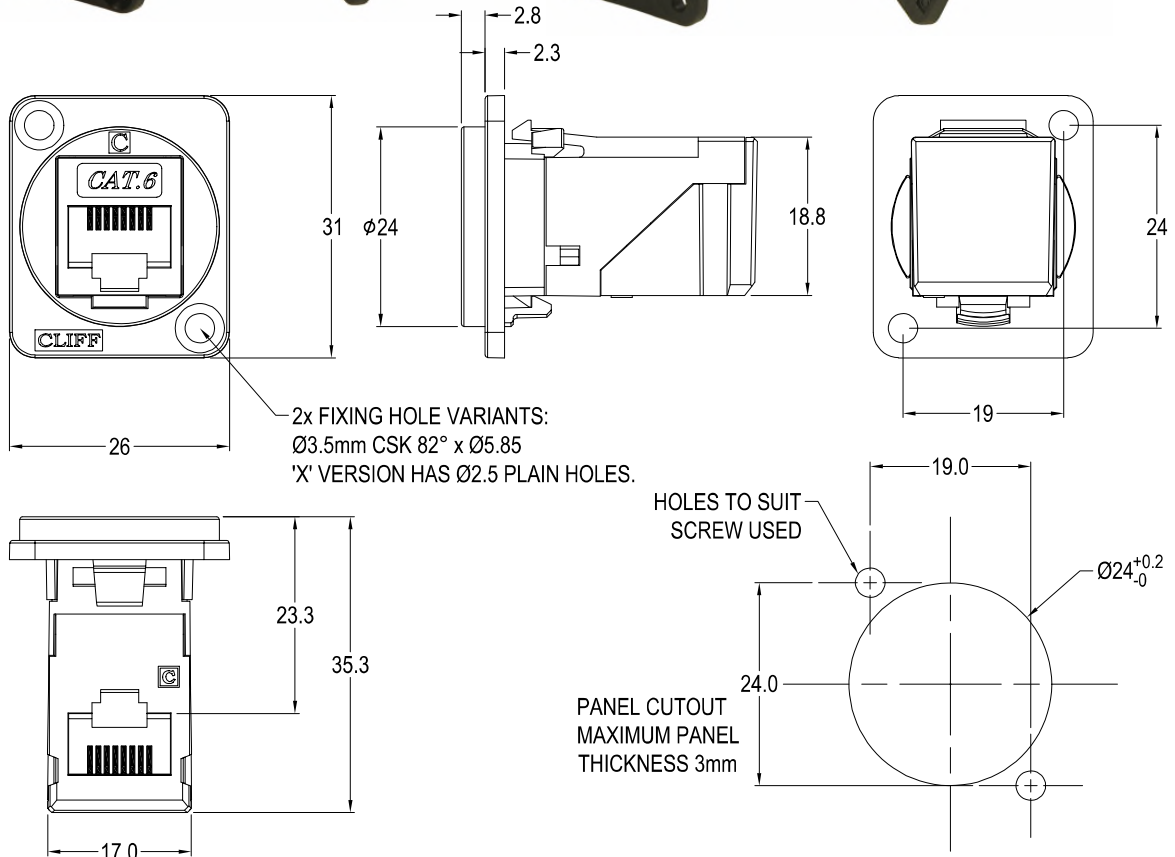


# CLIFF

## CAT6 RJ45 RIGHT ANGLE FEEDTHROUGH CONNECTOR (RAFT)

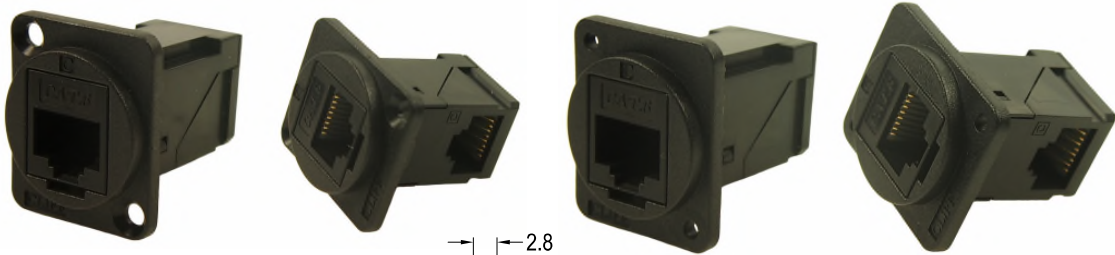

### VARIANTS

Part No.

**CP30252** RAFT Cat6 RJ45 Black plastic frame, CSK holes

**CP30252X** RAFT Cat6 RJ45 Black plastic frame, 2.5mm PLAIN holes

### Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile
- 90° or right angle rear cable entry.

### General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

### Material:

1. RJ45 In-Line Coupler: ABS UL94-V2
2. RJ45 In-Line Coupler Contact: Phosphor Bronze, gold plating.
3. PCB: FR4
4. Frame: Polyamide UL94-V2

### Performance:

1. T568A & T568B wiring.
2. Meet ISO/IEC 11801 and EN50173
3. Meet ANSI/TIA/EIA 568B.2
4. Rating 125VAC RMS 1.5A
5. Operating Temperatures: Min -10°C Max +60°C