





NOTES

- 1) Rating: AC 125V 4A 250V 2A
- 2) Contact R.: 20mΩ Max
- 3) Insulation R.: DC 500V 100MΩ Min
- 4) Dielectric Strength: AC 1500V 1 minute.
- 5) Electrical Life: 20,000 make/break cycles at full load.
- 6) Operating Temperature: -20°C ~65°C

ISS.	AMEND	DATE
1	ISSUED	24/01/07
2	P/No. ERROR	29/05/07
3	DIMS AMENDED	18/02/08
4	SPEC UPDATED	01/12/09
5	UPDATE, ADD ON/OFF	04/09/17
6	ADD PINS+SCHEMATIC	14/08/24

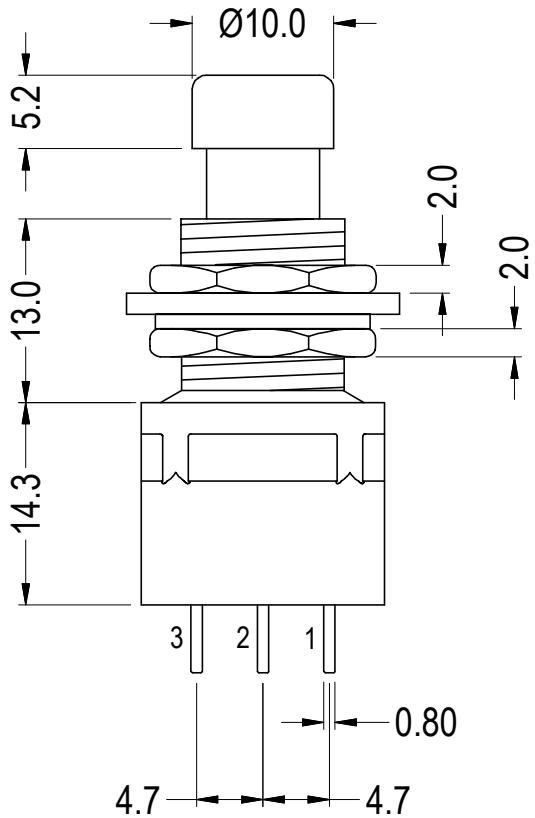

3PDT SOLDER TAG (ON / OFF)

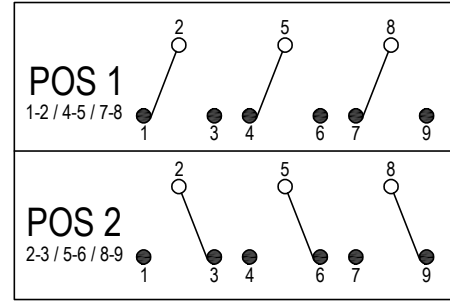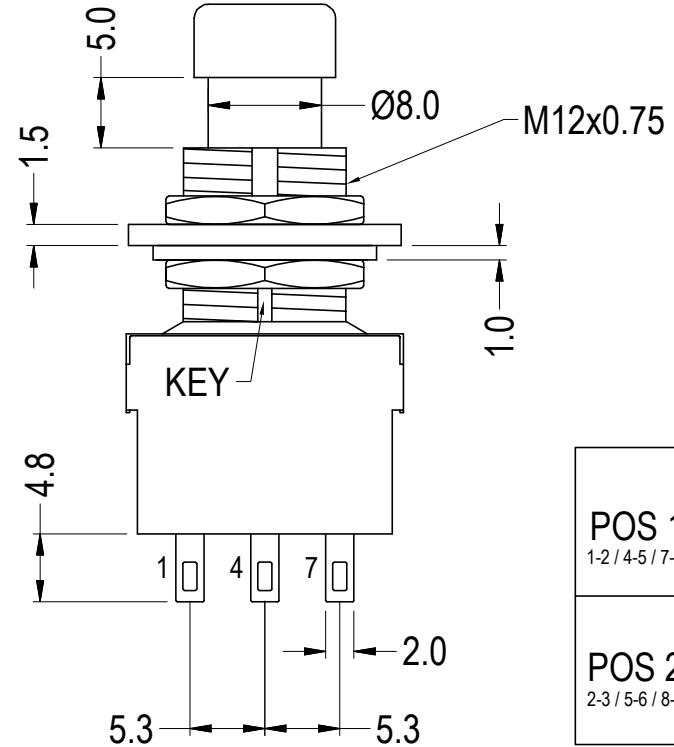

SWITCH FUNCTION

RoHS
COMPLIANT

TOLERANCE
NO DEC. PLACE ± 0.50
1 DEC. PLACE ± 0.25
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS
OTHERWISE STATED